



Glass Panel:
Max: 1000mm
39 3/8"

- On Wood Surface:**
 - Lag bolt 3/8"x5"
 - Optional: 3/8" thru-bolt or threaded rod with flat washers and nuts
- Fasteners Recommended on Concrete Surface:**
 - Wedge anchor 3/8"x4"

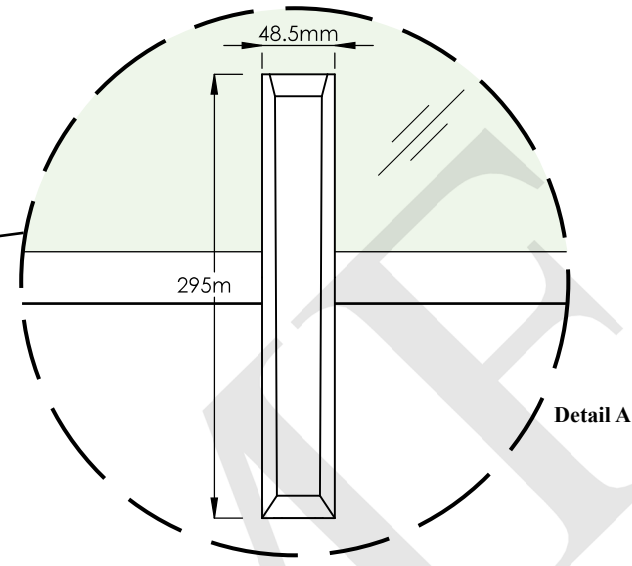

W (Inches)	X (Inches)	Y (Inches)	No. of Spigots
72	27	9	3
60	22	8	3
48	32	8	2
36	22	7	2
26	14	6	2

Glass Panel Height (Max.): 39 3/8"
 W (Glass Width): 26" Minimum
 X= 36" Maximum
 Y= 6" Minimum - 9" Maximum

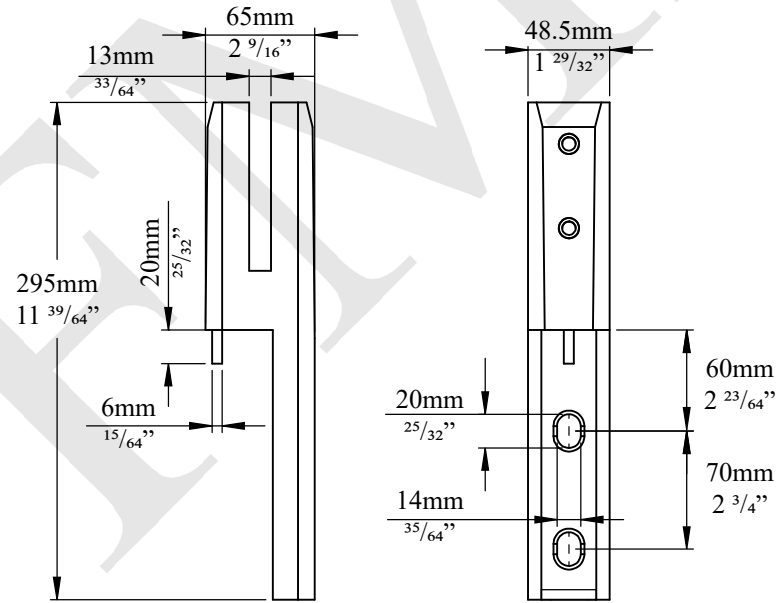

General Notes:

- The installed glass thickness must be 1/2" or 12mm and must be safety tempered.
- Recommendation is for hardware components only. Mounting the post to the base structure is a site condition and the installers must ensure that the fasteners are strong enough to resist the design weight.
- The base material to which the posts are being mounted must resist the design weight.

<p>NOTES:</p> <p>- PROPRIETARY AND CONFIDENTIAL - THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FMF GLASS HARDWARE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FMF GLASS HARDWARE IS PROHIBITED.</p>	<p>PRODUCT NAME: Square Edge Mount Spigot</p>		<p>PRODUCT MODEL NUMBER: SPI-6SE</p>		
	<p>DWG NO. SPI-6SE_1</p>	<p>UNIT: MM</p>	<p>DWG SIZE/SCALE A4/NTS</p>	<p>FMF GLASS HARDWARE</p>	<p>REV. 1</p>
	<p>DATE: 01.22</p>	<p>DRAWN BY: FMF</p>			